


Fiber Optic Pigtail (Simplex)

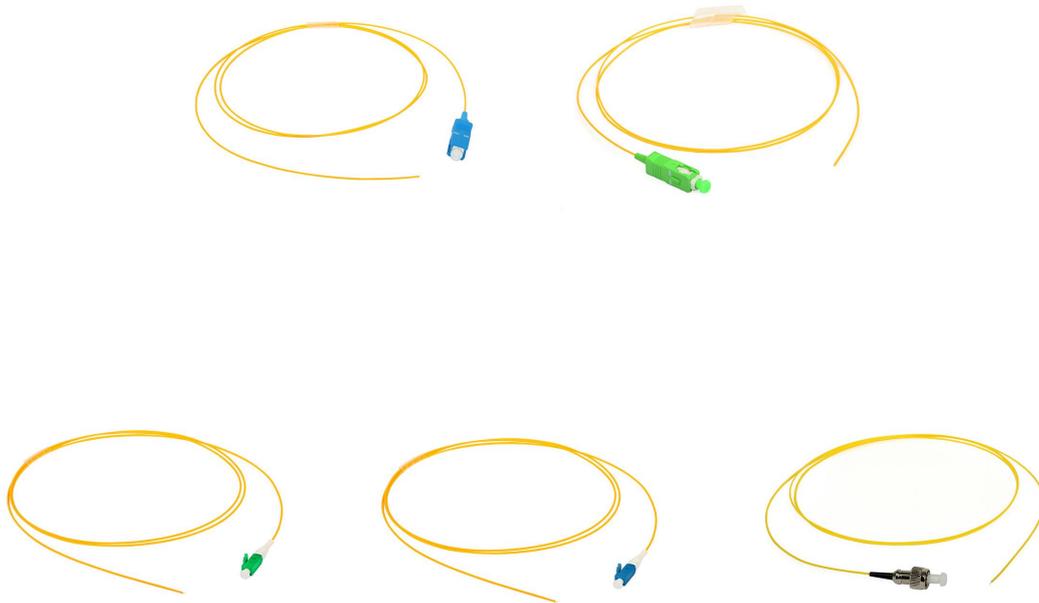

Product Description

Fiber Optic Pigtails are manufactured with either single-mode or multi-mode fibre and terminated with a range of connectors including SC, LC, FC, MU and MTRJ. Other connector types are also available upon request.

Features

- Low insertion loss, High return loss
- Ceramic Ferrule
- Good repeatability and exchangeability
- Excellent Polished and 100% tested
- Complying with Telcordia ,GR-326-Core, IEC and RoHS Standard

Application

- Telecommunications
- CATV, LAN, MAN, WAN, Test & Measurement
- Termination of optical networks via fusion or mechanical splicing
- Testing of optical devices
- Cable acceptance testing

Specification

Item	SM(Single Mode)		MM(Multi mode)
Fiber Cable Type	G652/G655/G657		OM1 OM2/OM3/OM4
Fiber Diameter (um)	9/125		62.5/125 50/125
Cable OD (mm)	0.9/1.6/1.8/2.0/2.4/3.0		
Connector type	LC/SC/FC/ST/MU		
Length	Customized		
Endface Type	UPC	APC	UPC
Typical Insertion Loss (dB)	<0.2	<0.3	<0.2
Return Loss (dB)	>50	>60	>30
Insert-pull Test (dB)	<0.2	<0.3	<0.15
Interchangeability (dB)	<0.1	<0.15	<0.1
Anti-tensile Force (N)	>70 (Cable OD>1.6mm)		
Temperature Range (°C)	-40~+80		