

24 Core Fiber Optic Distribution Box


Introduction

This box is used as a termination point for the feeder cable to connect with drop cable in FTTX communication network system.

It integrates fiber splicing, splitting, distribution, storage and cable connection in one unit. Meanwhile, it provides solid protection and management for the FTTX network building.

Features

- 1、 Total enclosed structure.
- 2、 Material: ABS, wet-proof, water-proof, dust proof, anti-aging, protection level up to IP65.
- 3、 Clamping for feeder cable and drop cable, fiber splicing, fixation, storage distribution ... etc all in one.
- 4、 Cable, pigtails, patch cords are running through own path without disturbing each other, cassette type SC adaptor .installation, easy maintenance.
- 5、 Distribution panel can be flipped up, feeder cable can be placed in a cup-joint way, easy for maintenance and installation.
- 6、 Box can be installed by the way of wall-mounted or poled-mounted, suitable for both indoor and outdoor uses.

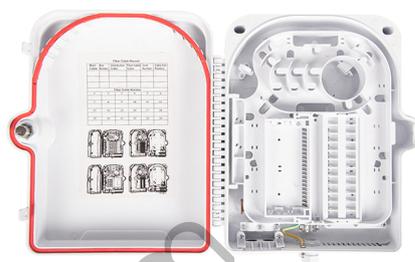

<A>



Configuration

Material	Size	Max Capacity	Nos of PLC	Nos of Adaptor	Weight	Ports
Strengthen ABS	A*B*C(mm) 330*275*110	Splice 24 Fibers (1trays, 24 core/tray)	PLC Splitter 1pcs of 1x16	24 pcs of SC(max)	1.43kg	4 in 24 out

Packing List

PCS/CARTON	Gross Weight (Kg)	Net Weight (Kg)	Carton Size (cm)	Cbm (m ³)
10	16.5	15.5	60*35*57	0.121

Standard Accessories

- Screw: 4mm*40mm 4pcs
- Cable tie: 3mm*10mm 6pcs
- Heat-shrink sleeve :60mm 24pcs
- Transparent protective sheet: 2pcs
- Plastic protective pipe: 24pcs
- Expansion bolt: M6 4pcs
- Digital label paste: 1pcs
- Isolasi tape: 1pcs
- specification : 1pcs
- Key: 1pcs

Optional Accessories

- steel sheet metal: 2pcs
- Hoop: 235mm 2pcs
- Screw: 4pcs

