

16 Core Fiber Optic Distribution Box


Description

This box is used as a termination point for the feeder cable to connect with drop cable in FTTX communication network system.

It intergrates fiber splicing, splitting, distribution, storage and cable connection in one unit. Meanwhile, it provides solid protection and management for the FTTX network building.

Features

- 1. Total enclosed structure.
- 2. Material: ABS, wet-proof, water-proof, dust proof, anti-aging, protection level up to IP65.
- 3. Clamping for feeder cable and drop cable, fiber splicing, fixation, storage distribution ... etc all in one.
- 4. Cable, pigtails, patch cords are running through own path without disturbing each other, cassette type SC adaptor .installation, easy maintenance.
- 5. Distribution panel can be flipped up, feeder cable can be placed in a cup-joint way, easy for maintenance and installation.
- 6. Box can be installed by the way of wall-mounted or poled-mounted, suitable for both indoor and outdoor uses.

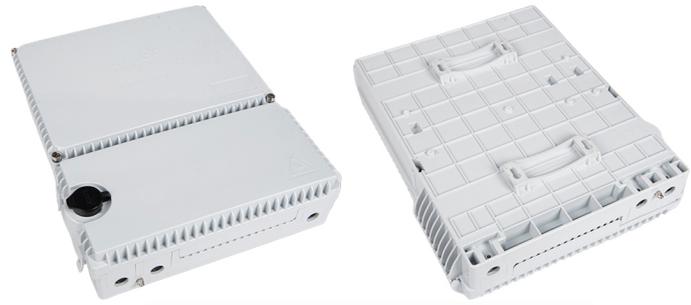

Optional cover

: fej^l iXkf e

D Xk i Xc	J`q\	D Xo XgXZ`kp	Nos of PLC	E f j f] 8[Xgkfi	N \ ^ _k	Gf i kj
Strengthen Polymer Plastic	A*B*C(mm) 343*303*98	Splice 16 Fibers (1trays, 16 fiber/tray)	/	16 pcs of SC(max)	2. 15kg	3 in 16 out

Packing List

PCS/CARTON	Gross Weight (Kg)	Net Weight (Kg)	Carton Size (cm)	Cbm (m ³)
8	18.5	17.5	60.5*37.5*47	0.107

Standard Accessories

- Screw: 4mm*40mm 4pcs
- Expansion bolt: M6 4pcs
- Cable tie: 3mm*10mm 6pcs
- Heat-shrink sleeve: 1.0mm*3mm*60mm 16pcs
- Key: 2pcs
- hoop ring: 5pcs
- Insulating tape: 1pcs

